




Scan Me

View Project Portal

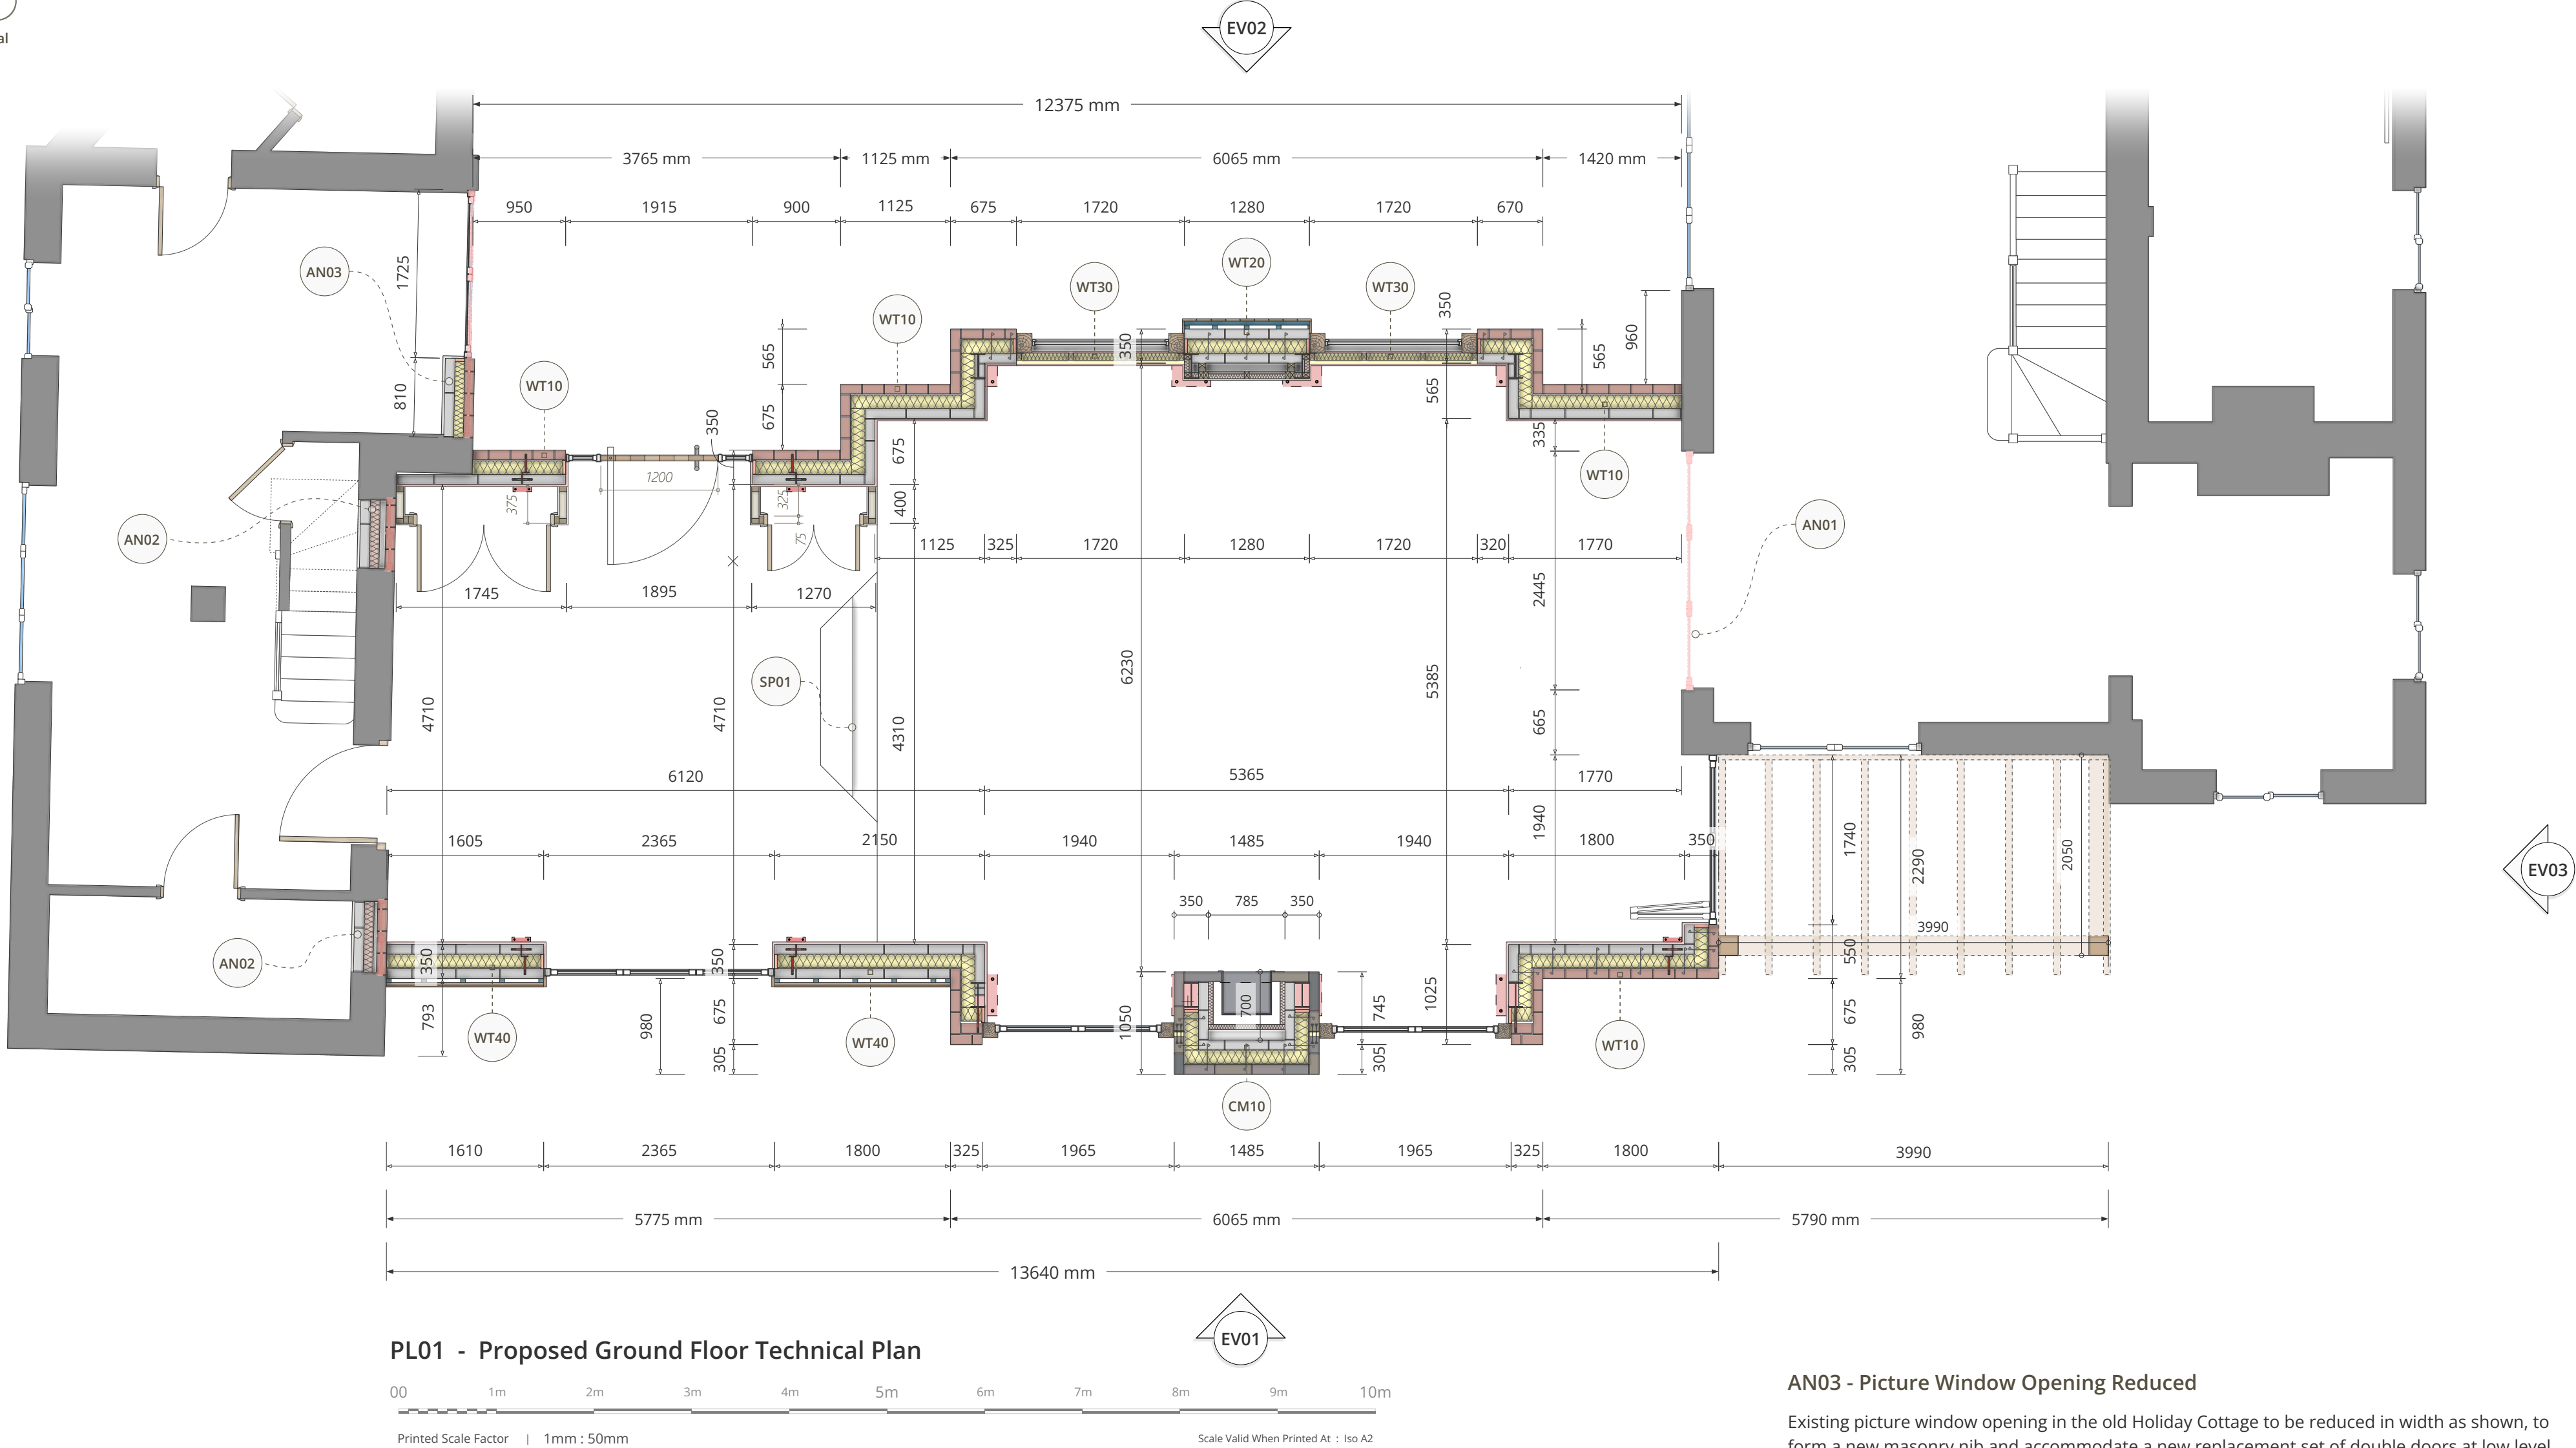

AN01 - Existing Patio Doors & Wall Removal

Removal Of Existing Patio Doors And Installation Of Bearers The Contractor is to remove the existing patio doors situated between the dining area and the new extension, cutting back the head reveal to facilitate a continuous flush ceiling profile. Structural support is to be provided by timber bearers (Ref: T5/T6) specified as 75x150mm C24 timber. These must be chemically anchored to the existing masonry—strictly not into mortar joints—using M12 resin anchors at 450mm horizontal centres, in accordance with the Structural Engineer's specification.

GN11 - Length Dimensions

All dimensions shown are to structural opening sizes or to coarse construction, representing bare wall dimensions only, including masonry openings, brickwork, blockwork, and studwork, unless expressly stated otherwise within the dimension text. These dimensions do not include plasterboard, internal linings, wall finishes, cladding systems, service voids, or applied finishes of any kind. As a result, final finished room sizes will be smaller than the dimensions shown once linings and finishes are installed. The Contractor shall allow for all required finishes, build-ups, and construction tolerances when setting out and carrying out the works.

AN02 - Existing Window Openings Removed

Existing Guest House windows at these locations are to be removed and openings fully infilled in masonry to match existing construction. New infill to be toothed and bonded into existing brickwork/blockwork where practicable, with all perp and bed joints fully filled and brickwork laid out to maintain existing coursing.

On the extension side, the internal face of this wall is to be exposed brickwork; all infill brickwork is to be carefully set out, jointed and pointed to match the existing internal brick finish so that the previous window openings are not discernible and the wall reads as a continuous, tidy brickwork face.

On the existing Holiday Cottage side, infill is to be blockwork to match existing backing construction, with plasterboard on dabs or battens and skim finish to blend in flush with the surrounding wall surfaces, ready for decoration. Junctions with existing plaster are to be feathered out to avoid visible ridges or cracking.

Where accessible and compatible with the existing construction, mineral wool acoustic insulation (e.g. Rockwool) may be installed within the cavity to improve resistance to sound transmission between the extension and existing building.

AN03 - Picture Window Opening Reduced

Existing picture window opening in the old Holiday Cottage to be reduced in width as shown, to form a new masonry nib and accommodate a new replacement set of double doors at low level and a new window at first-floor level above. The picture window opening has been reduced in width to ensure that the new extension porch flat roof can abut the old Holiday Cottage cleanly without fouling the window frame, and to create a tidy masonry nib for the porch detail and roof abutment.

New masonry infill to be constructed as a cavity wall, with the external brickwork leaf to match the existing brickwork in size, colour, bond and joint profile, toothed and bonded into the existing brickwork where practicable so the alteration reads as part of the original elevation. Coursing and joint lines are to be carefully set out to avoid obvious “patched” areas.

The new cavity is to be insulated with Knauf Insulation DriTherm 32 Cavity Insulation Slab, 150 mm thick, 1200 x 455 mm, or equal approved, installed in accordance with the manufacturer's instructions. Insulation is to be close-fitted, with all joints tightly butted. Maintain or reinstate all required DPCs where necessary.

Internally, blockwork inner leaf and wall linings (plasterboard and skim, or plaster finish as existing) are to be extended and made good to blend in with surrounding wall surfaces.