




Scan Me

View Project Portal

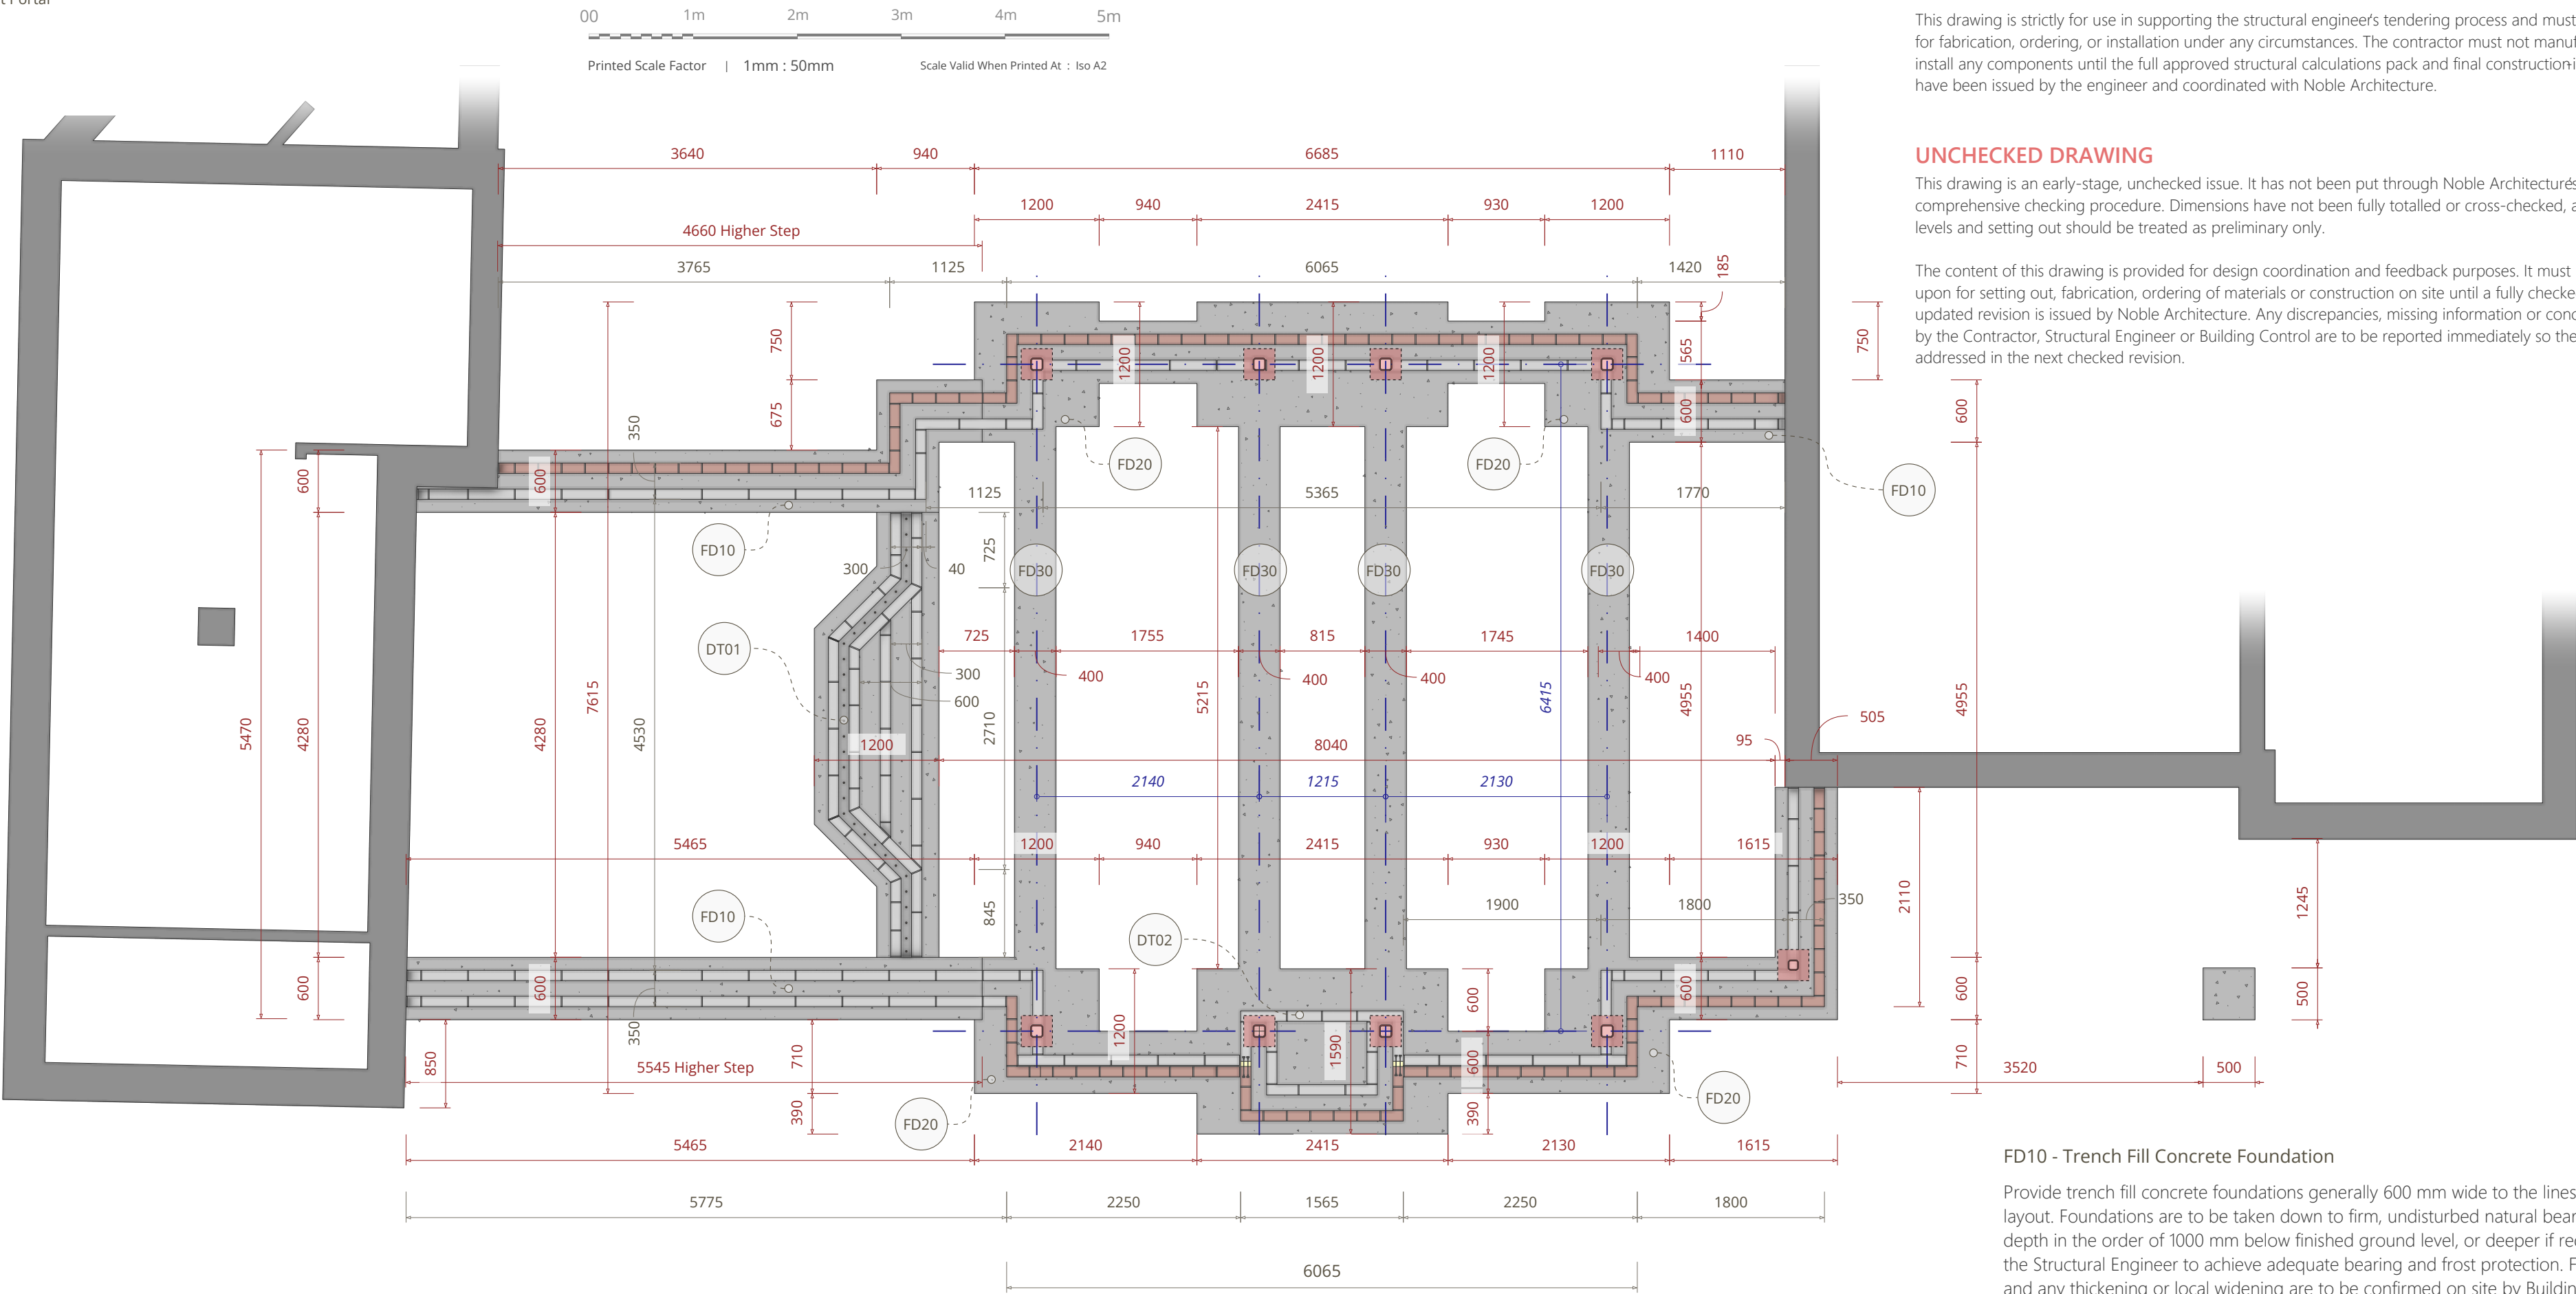

PRELIMINARY DRAWING:

This drawing is strictly for use in supporting the structural engineer's tendering process and must not be used for fabrication, ordering, or installation under any circumstances. The contractor must not manufacture or install any components until the full approved structural calculations pack and final construction issue drawings have been issued by the engineer and coordinated with Noble Architecture.

UNCHECKED DRAWING

This drawing is an early-stage, unchecked issue. It has not been put through Noble Architectur s full comprehensive checking procedure. Dimensions have not been fully totalled or cross-checked, and all details, levels and setting out should be treated as preliminary only.

The content of this drawing is provided for design coordination and feedback purposes. It must not be relied upon for setting out, fabrication, ordering of materials or construction on site until a fully checked and updated revision is issued by Noble Architecture. Any discrepancies, missing information or concerns identified by the Contractor, Structural Engineer or Building Control are to be reported immediately so they can be addressed in the next checked revision.

IMPORTANT PRELIMINARY FOUNDATION DRAWING NOTE

This drawing is issued for early-stage design and coordination only. It is not to be used as a construction drawing for setting out, excavation or pouring of foundations until the Structural Engineer has reviewed the proposed scheme and confirmed the suitability, depth, width and reinforcement of all foundations in relation to the actual ground conditions and the structural members specified in his report.

All foundation sizes, types and depths indicated on this drawing are preliminary and indicative only, provided to facilitate discussion between the Structural Engineer, Building Control and Contractor. Final foundation design remains the responsibility of the appointed Structural Engineer and must be agreed before any construction work proceeds.

The Building Control Officer must be consulted regarding required excavation depths and bearing strata. A preliminary site investigation and trial digging have indicated gravelly loam subsoil with only a surface layer of clay; this has been confirmed by the Contractor and photographic evidence has been received. These findings are indicative only and do not remove the need for Building Control and Structural Engineer approval based on actual conditions observed in the trench at the time of excavation.

No foundations are to be constructed, concreted or reinforced based solely on this drawing. All final sizes, details and any changes arising from Building Control inspection, Structural Engineer's design or Contractor's findings on site must be incorporated into a revised, approved construction issue drawing before works proceed. Any discrepancies or unexpected ground conditions are to be reported immediately to the Structural Engineer, Noble Architecture & Building Control.

FD20 - Trench Fill Concrete Columns Pads

Provide concrete pad foundations beneath all structural columns in the main hall section of the extension, located as shown on the foundation layout. Each column is to seat centrally on a nominal L1200 x W1200 x D1000mm deep in-situ concrete pad, subject to confirmation and final design by the Structural Engineer and approval by Building Control. Pad dimensions, depth and reinforcement shown at this stage are preliminary only and are to be refined once final column loads, bearing capacity of the founding strata and any adjacent drainage or services constraints are known.

Pads are to be cast in mass concrete of minimum strength class C30/35 (or as specified by the Structural Engineer), founded on firm, undisturbed natural ground of adequate bearing capacity and below the depth of frost penetration and any topsoil, fill or made ground. Where weak, organic or otherwise unsuitable material is encountered at the proposed founding level, the excavation is to be deepened locally or over-excavated and brought back up with engineered fill or concrete to the Structural Engineer's instructions. Top of pad level is to be coordinated with any trench fill strip foundations, ground beams and slab build-ups to ensure correct column base plate levels and bearing.

All pad reinforcement (if required), cover, starter bars and holding down bolt details are to be designed and scheduled by the Structural Engineer and set out on his drawings. Contractor to ensure accurate positioning, level and orientation of all pads and holding down bolts to suit the structural steelwork/column setting-out drawings, checking dimensions prior to pour. No pads are to be concreted until Building Control and, where required, the Structural Engineer have inspected the open excavations and confirmed that bearing strata and depths are acceptable. Any discrepancies or unforeseen conditions are to be reported immediately to the Structural Engineer and Building Control before proceeding.

FD30 - Narrow Column Spread Foundations

Provide narrow strip "Spread" foundations, nominally 400 mm wide, located adjacent to and spanning between the main column pad foundations as shown on the foundation layout. These strips are intended to increase the effective bearing area, help distribute vertical loads and edge shear forces, and provide additional tying between pads along the length of the hall to improve resistance to cross-shearing. All load paths, tying action and shear resistance are to be confirmed and designed by the Structural Engineer.

Concrete grade for these narrow spread foundations is to match the adjacent trench fill / pad foundations (minimum C30/35 unless noted otherwise by the Structural Engineer). Depth and founding level are preliminary and diagrammatic only; it is anticipated that these strips may be shallower than the main 1.0 m deep trench fill in some locations (e.g. in the order of 500 mm), subject to the Structural Engineer's design and Building Control approval. Final width, depth, reinforcement (if any) and connection details to the column pads and surrounding foundations are to be designed and scheduled by the Structural Engineer.

Where practicable, narrow spread foundations are to be cast monolithically with the adjoining pad foundations to avoid cold joints and ensure continuity. Where this is not possible, dowel bars or other mechanical connectors are to be provided in accordance with the Structural Engineer's details.

All excavation, inspection of founding strata and confirmation of final depths for these narrow spread foundations must be agreed on site with Building Control and, where required, the Structural Engineer prior to concreting. These foundations are shown as an indicative enhancement to the steel column and beam support system and are not to be relied upon for structural performance until the Structural Engineer has completed and issued his final design.

FD10 - Trench Fill Concrete Foundation

Provide trench fill concrete foundations generally 600 mm wide to the lines shown on the foundation layout. Foundations are to be taken down to firm, undisturbed natural bearing strata, with an anticipated depth in the order of 1000 mm below finished ground level, or deeper if required by Building Control or the Structural Engineer to achieve adequate bearing and frost protection. Final depth, width, bearing level and any thickening or local widening are to be confirmed on site by Building Control and the Structural Engineer based on actual ground conditions encountered. Foundation concrete is to be of minimum strength class C30/35 (or as specified by the Structural Engineer), placed in a single continuous pour to minimise cold joints. Concrete to be properly compacted and levelled to required top-of-foundation level, with surfaces prepared to receive any blockwork upstands or walls above.

Where trench fill foundations step to follow changes in external ground level or internal floor level, stepping is to be carried out only where indicated on the drawings or as agreed with the Structural Engineer, with minimum step dimensions and overlaps in accordance with his details. Steps are to be formed with shuttering as required to maintain full section width and avoid feathered edges. Foundations must be taken at least 150 mm below the invert level of any adjacent drainage and must not undermine existing foundations on the cottage or neighbouring structures; any conflicts with existing drains, soakaways or services to be reported and resolved with Building Control and the Structural Engineer before proceeding.

All topsoil, soft spots, fill, organic material or loose disturbed ground at trench bases to be removed and the excavation deepened or over-excavated and brought back up in concrete or engineered fill to the Structural Engineer's instructions. Trench sides are to be kept safe and stable at all times; Contractor to provide appropriate shoring or battering to prevent collapse, particularly in loose or water-bearing ground. No concrete is to be poured into waterlogged trenches; standing water must be removed and any softened material cleaned out immediately prior to concreting.

Building Control Officer and, where required, the Structural Engineer must inspect and approve all open trenches and proposed founding levels before concrete is poured. All foundation sizes, depths and reinforcement shown at this stage are preliminary and indicative only and are subject to adjustment on site following these inspections and the Structural Engineer's final design. Any discrepancies between assumed and actual ground conditions, or any unforeseen obstructions, are to be reported immediately to the Structural Engineer and Building Control and works in the affected area are not to proceed until revised instructions are issued.