




Scan Me

View Project Portal

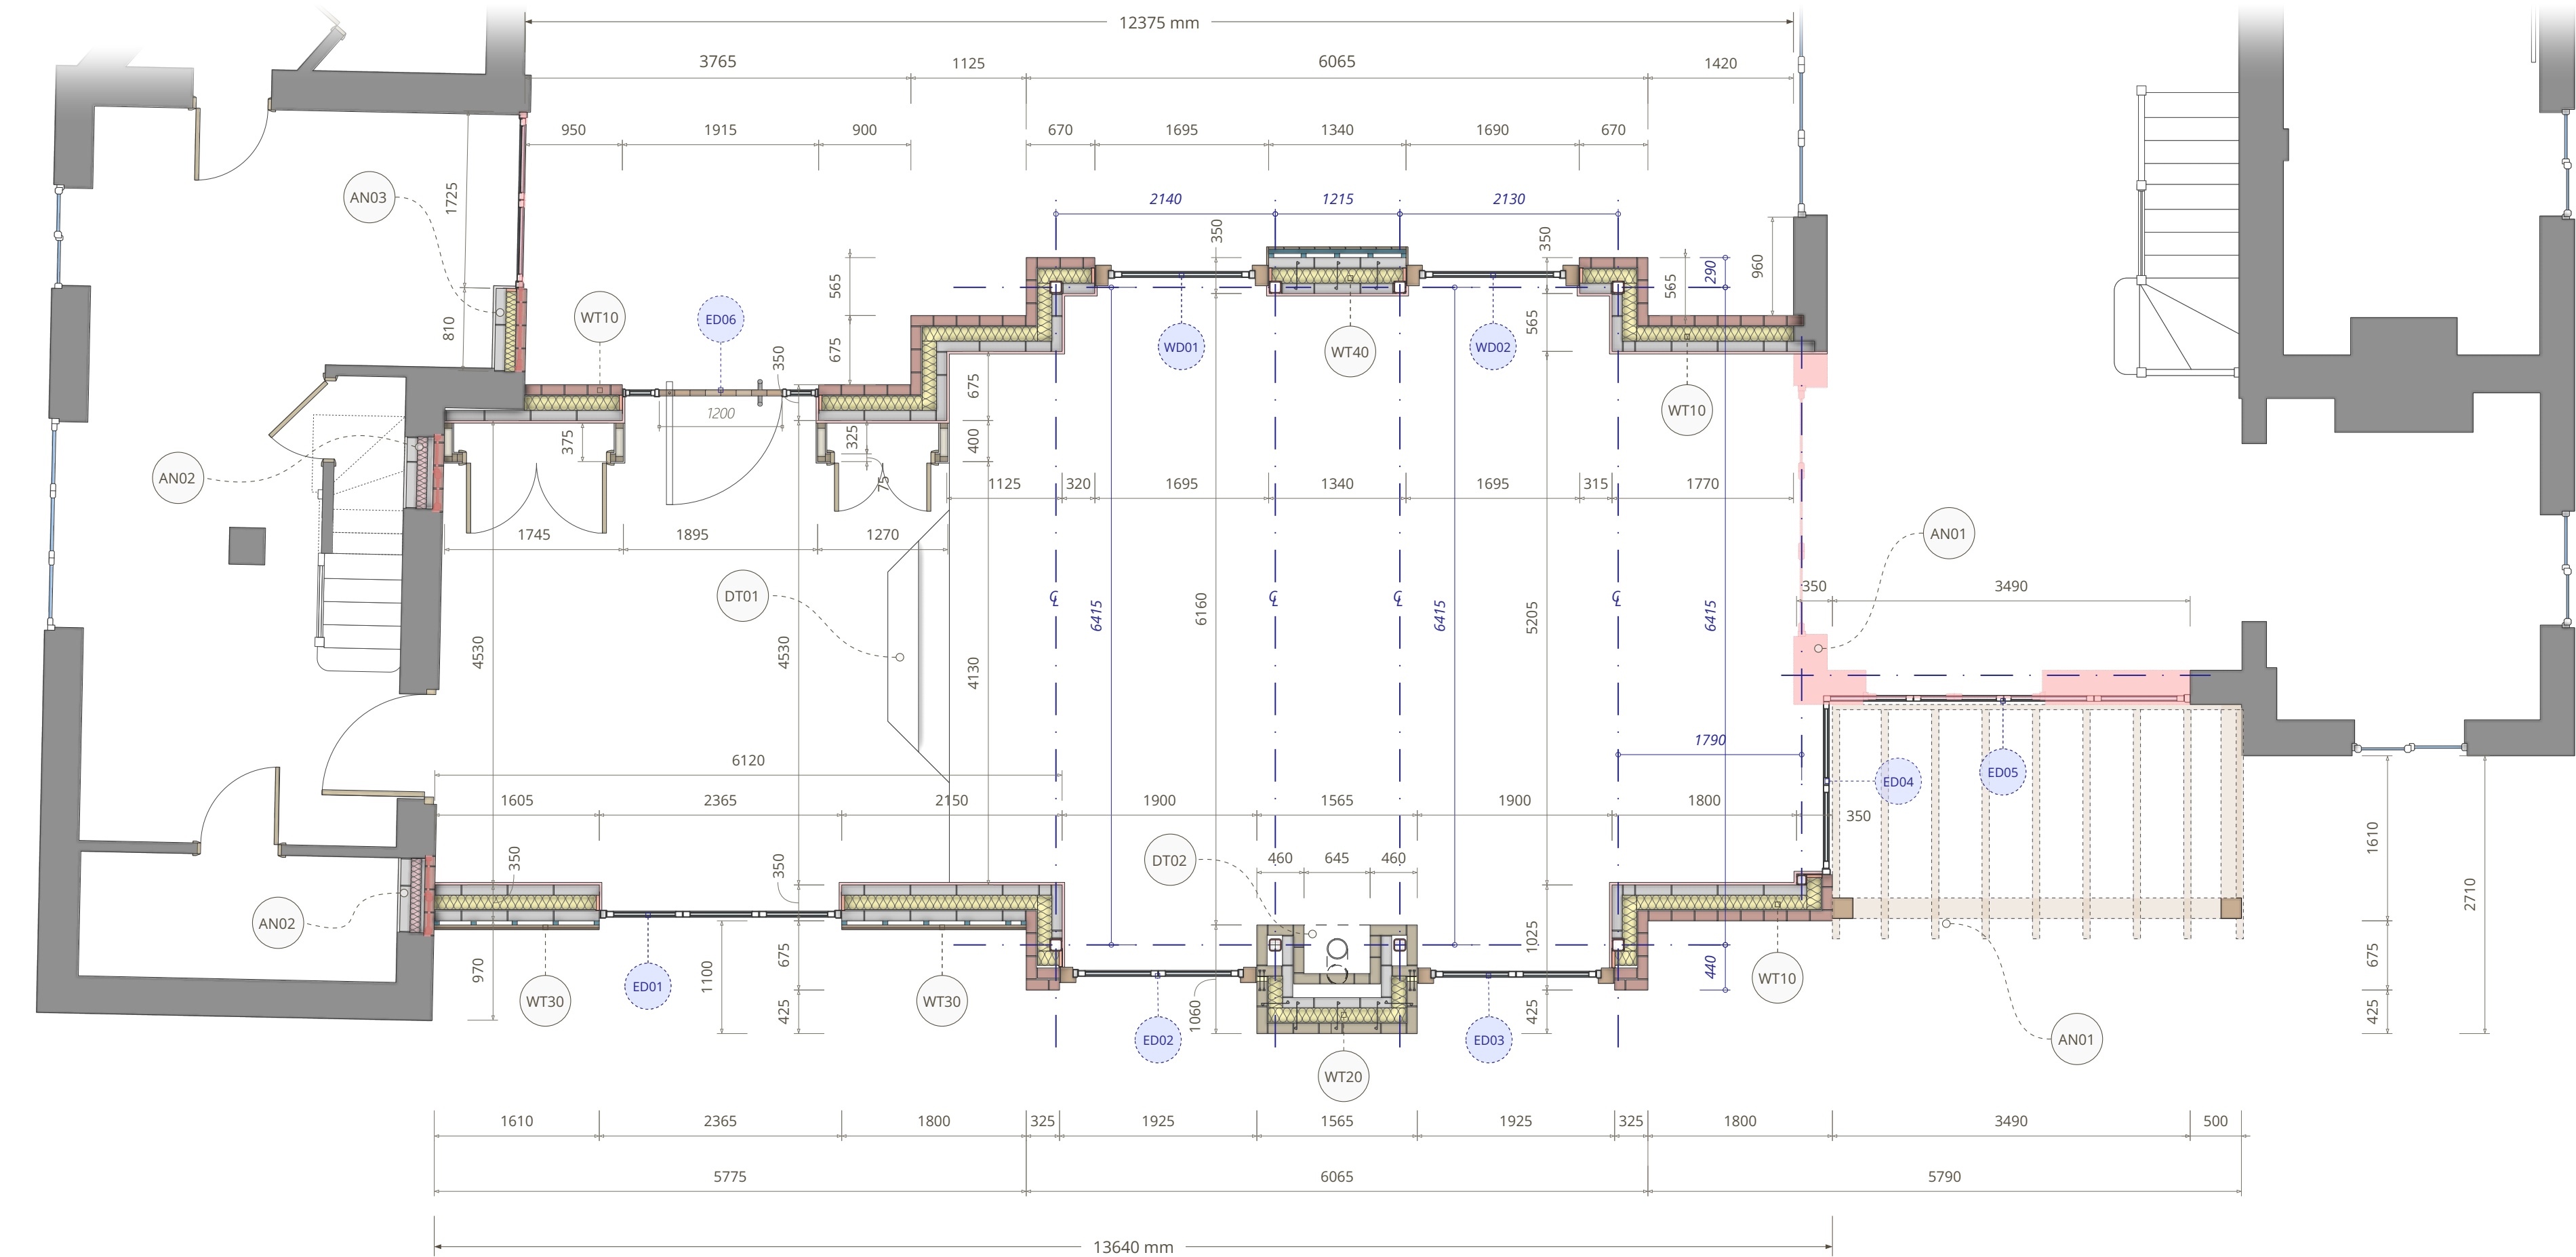

Printed Scale Factor | 1mm : 50mm Scale Valid When Printed At : Iso A2

AN01 - Existing Building Corner Removal & Corner Opening

Existing corner of main cottage to be removed at this point to form a new opening and accommodate doors ED04 and ED05. In their fully open position ED04 and ED05 will create an open corner condition between the building interior and the veranda patio area. Primary support to the new corner line is to be provided by beams BM06 and BM07, forming a T-junction with a concentrated point load at the junction. There is to be no internal corner post at this junction; all loads, connections, deflection limits, bearing requirements and any required temporary works are to be designed, detailed and certified by the Structural Engineer.

Structural Engineer and Contractor must carry out a thorough inspection of the existing building fabric, structure and foundations in the affected area prior to commencement of demolition to confirm suitability for the proposed alterations and load paths. All assumptions about existing construction shown on these drawings are based on a limited, non-invasive survey only; Noble Architecture has not opened up the structure. Any discrepancies, inadequate support or unforeseen conditions are to be reported immediately to the Structural Engineer, and works are not to proceed in the affected area until an agreed revised detail is issued.

AN02 - Existing Window Openings Removed

Existing Guest House windows at these locations are to be removed and openings fully infilled in masonry to match existing construction. New infill to be toothed and bonded into existing brickwork/blockwork where practicable, with all perp and bed joints fully filled and brickwork laid out to maintain existing coursing.

On the extension side, the internal face of this wall is to be exposed brickwork; all infill brickwork is to be carefully set out, jointed and pointed to match the existing internal brick finish so that the previous window openings are not discernible and the wall reads as a continuous, tidy brickwork face.

On the existing Holiday Cottage side, infill is to be blockwork to match existing backing construction, with plasterboard on dabs or battens and skim finish to blend in flush with the surrounding wall surfaces, ready for decoration. Junctions with existing plaster are to be feathered out to avoid visible ridges or cracking.

Where accessible and compatible with the existing construction, mineral wool acoustic insulation (e.g. Rockwool) may be installed within the cavity to improve resistance to sound transmission between the extension and existing building.

AN03 - Picture Window Opening Reduced

Existing picture window opening in the old Holiday Cottage to be reduced in width as shown, to form a new masonry nib and accommodate a new replacement set of double doors at low level and a new window at first-floor level above. The picture window opening has been reduced in width to ensure that the new extension porch flat roof can abut the old Holiday Cottage cleanly without fouling the window frame, and to create a tidy masonry nib for the porch detail and roof abutment.

New masonry infill to be constructed as a cavity wall, with the external brickwork leaf to match the existing brickwork in size, colour, bond and joint profile, toothed and bonded into the existing brickwork where practicable so the alteration reads as part of the original elevation. Coursing and joint lines are to be carefully set out to avoid obvious "patched" areas.

The new cavity is to be insulated with Knauf Insulation DriTherm 32 Cavity Insulation Slab, 150 mm thick, 1200 x 455 mm, or equal approved, installed in accordance with the manufacturer's instructions. Insulation is to be close-fitted, with all joints tightly butted. Maintain or reinstate all required DPCs where necessary.

Internally, blockwork inner leaf and wall linings (plasterboard and skim, or plaster finish as existing) are to be extended and made good to blend in with surrounding wall surfaces.

PRELIMINARY DRAWING:

This drawing is strictly for use in supporting the structural engineer's tendering process and must not be used for fabrication, ordering, or installation under any circumstances. The contractor must not manufacture or install any components until the full approved structural calculations pack and final construction-issue drawings have been issued by the engineer and coordinated with Noble Architecture.

UNCHECKED DRAWING

This drawing is an early-stage, unchecked issue. It has not been put through Noble Architecture's full comprehensive checking procedure. Dimensions have not been fully totalled or cross-checked, and all details, levels and setting out should be treated as preliminary only.

The content of this drawing is provided for design coordination and feedback purposes. It must not be relied upon for setting out, fabrication, ordering of materials or construction on site until a fully checked and updated revision is issued by Noble Architecture. Any discrepancies, missing information or concerns identified by the Contractor, Structural Engineer or Building Control are to be reported immediately so they can be addressed in the next checked revision.