

GN21 - Height Setting Out Dimensions


Extreme care is required when reading all height-related dimensions. Users of these drawings must carefully check the termination points of each height dimension to confirm which Finished Floor Level datum applies. The Global Project Datum is defined as the existing Finished Floor Level of the Main Cottage Dining Room (Lower Level). All vertical dimensions indicate the top of the final finished floor surface and do not represent structural slab, screed, or sub-floor levels. The Contractor shall therefore calculate all structural and sub-floor levels by deducting the confirmed thickness of the final floor finish and any adhesive or levelling build-up once selected by the Client. The site comprises two separate and distinct finished floor planes, being the Lower Level at the Main Cottage and the Higher Level at the Smaller Cottage, connected by steps within the new extension. Care must therefore be taken at all times to verify which of the two Finished Floor Levels a dimension terminates at. Where any ambiguity exists, Noble Architecture should be contacted for clarification prior to setting out.

GN22 - Datum Levels And Site Benchmarks

To minimise setting-out and level transfer errors, the Contractor shall establish two permanent on-site datum benchmarks immediately upon commencement of the works. One benchmark shall be fixed to the Lower Level Finished Floor Level datum and one to the Higher Level Finished Floor Level datum. These benchmarks shall be robust, protected from disturbance, and clearly identified for the duration of the works. This provides a consistent physical reference enabling workmen to convert architectural Finished Floor Level dimensions to structural levels by applying a constant deduction for floor finishes relative to the correct zone. Unless explicitly noted otherwise, all levels shown on the drawings are referenced to one of these two Finished Floor Level datums.

GN11 - Length Dimensions

All dimensions shown are to structural opening sizes or to coarse construction, representing bare wall dimensions only, including masonry openings, brickwork, blockwork, and studwork, unless expressly stated otherwise within the dimension text. These dimensions do not include plasterboard, internal linings, wall finishes, cladding systems, service voids, or applied finishes of any kind. As a result, final finished room sizes will be smaller than the dimensions shown once linings and finishes are installed. The Contractor shall allow for all required finishes, build-ups, and construction tolerances when setting out and carrying out the works.

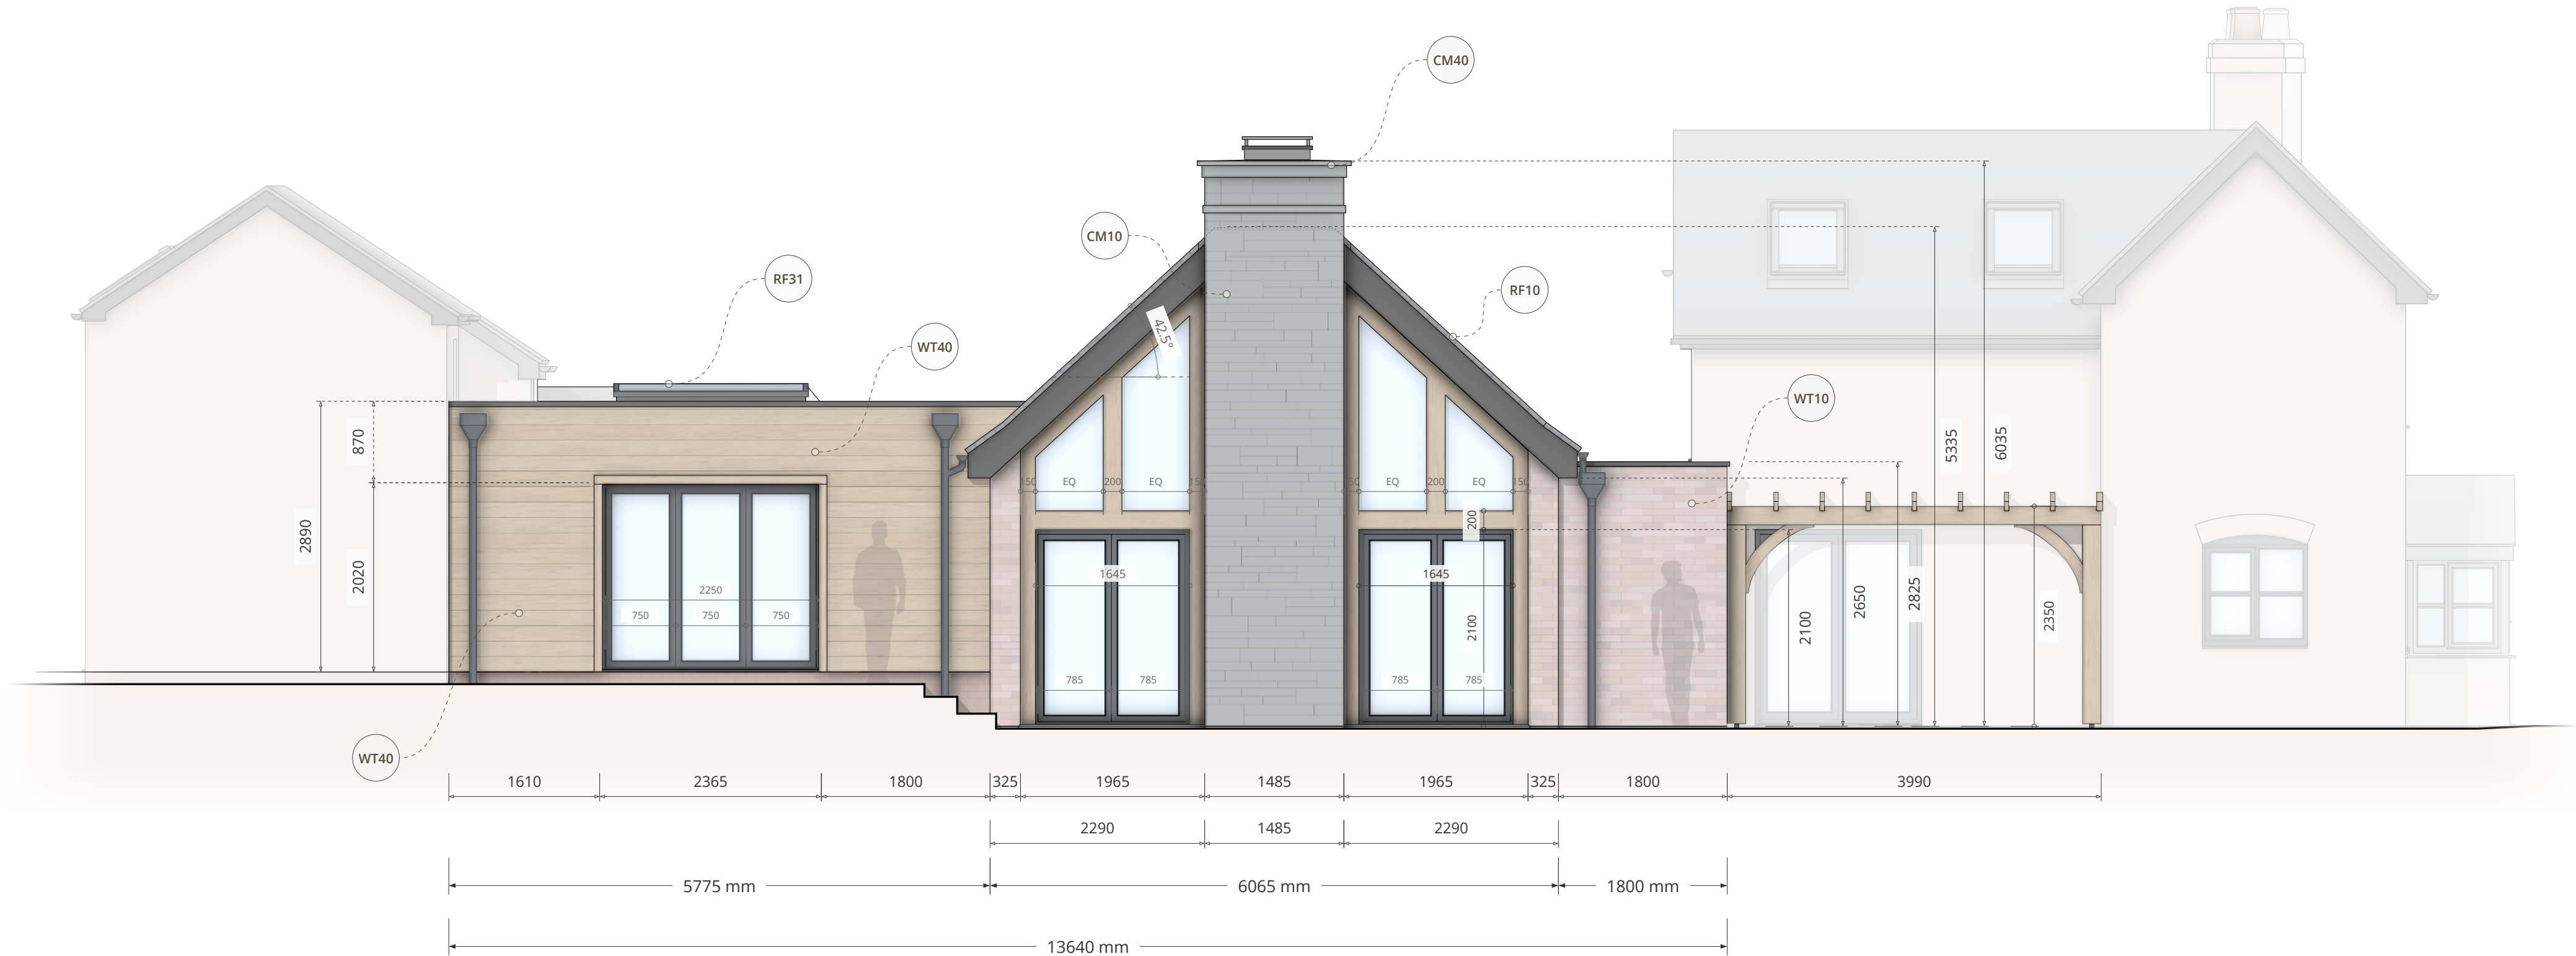

EV01 - Proposed West Elevation



GN12 - Pre-Fabricated And Manufactured Elements

All prefabricated, bespoke, and manufactured elements, including but not limited to windows, doors, rooflights, glazing systems, stair components, and structural steelwork, shall be subject to full on-site measurement by the relevant manufacturer or fabricator prior to manufacture. Dimensions shown on these drawings are indicative only and represent design intent in a notional or“perfect world” condition. They shall not be relied upon for fabrication without independent site verification.

The Contractor is responsible for ensuring that all manufacturers, suppliers, and fabricators undertake their own site surveys and confirm all critical dimensions, levels, tolerances, and interfaces prior to production. Any discrepancies between site conditions and the drawings shall be reported to Noble Architecture immediately and resolved before manufacture proceeds. No prefabricated element shall be ordered or fabricated solely on the basis of drawing dimensions. Structural steelwork shall be measured, detailed, and fabricated in accordance with BS EN 1090 and Eurocode 3, and windows and rooflights shall comply with the relevant product standards and BBA certification requirements.