




Project Portal
Scan QR code to access the Project Portal.
Navigate the 3D model via TrueVision3D,
and view, measure, and share plan
documents using PlanVision.



View Project Portal
• Measuring Tools
• Interactive 3D Model
• Live Documents Online



Proposed Site Block Plan

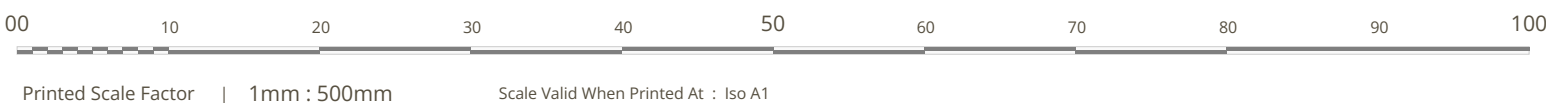

DR01 | Planting Beds With Embedded Lateral Soakaway Network


The new planting beds shown wrapping the proposed terrace levels are working drainage infrastructure as well as soft landscaping. An extensive, shallow, laterally spread soakaway and attenuation system, approximately 1 m deep, is to be embedded beneath these beds, formed within the free-draining gravelly sandy loam proven by trial pits GC01 and GC02. All new hard surfaces, and all threshold channel drains (note DR02), discharge to this network. The beds above are to be stocked with deliberately thirsty, high-water-demand planting so that stored stormwater is drawn down between rainfall events by evapotranspiration as well as by infiltration, in the manner of a bioretention system. The shallow, laterally extensive configuration keeps the base of the system high in the soil profile, maximising separation from seasonal groundwater, and its capacity can be extended simply by spreading further within the beds. Final sizing is subject to BRE Digest 365 infiltration testing and a groundwater level check prior to commencement, and the completed system must be designed and installed in full compliance with current Building Regulations and CIRIA guidance.

DR02 | Threshold Channel Drainage To All Door Openings


Slot channel drainage (Aco or equivalent co-slot system) must be provided on and along every side of the new accommodation where a door opening is present, including the bi-folding door openings of the main rear extension, the new inset porch, and the garden room. A channel drain must likewise be provided at every interface where a building line meets an external level change, so that surface water is intercepted before it can pond against any threshold. All channel drains discharge to the buried lateral soakaway network beneath the planting beds (note DR01). All drainage falls, outlets, and connections must be designed and installed in full compliance with current Building Regulations.

DR03 | Stepped Terrace Levels And Water Shedding Arrangement


The rear terrace is arranged as three distinct levels which graduate down and away from the dwelling, comprising two areas of paved hardstanding and one decked level. The uppermost paved level sits immediately against the house and is elevated above the existing terrace level, forming a slight protective platform with a continuous hard edge at the foot of the building. The middle paved level carries the sunken social seating area aligned on the garden room. The lowest level, serving the veranda and jacuzzi area, is finished in timber decking laid with clear gaps between the boards over a free-draining substrate, so that rainfall passes through into the ground rather than running off a further impermeable surface. Each level change adds freeboard between external ground and the internal floor level, and every threshold and level change is served by channel drainage in accordance with note DR02. The full water shedding and flood mitigation rationale for this arrangement is set out at Section 9.4 of the Design and Access Statement.

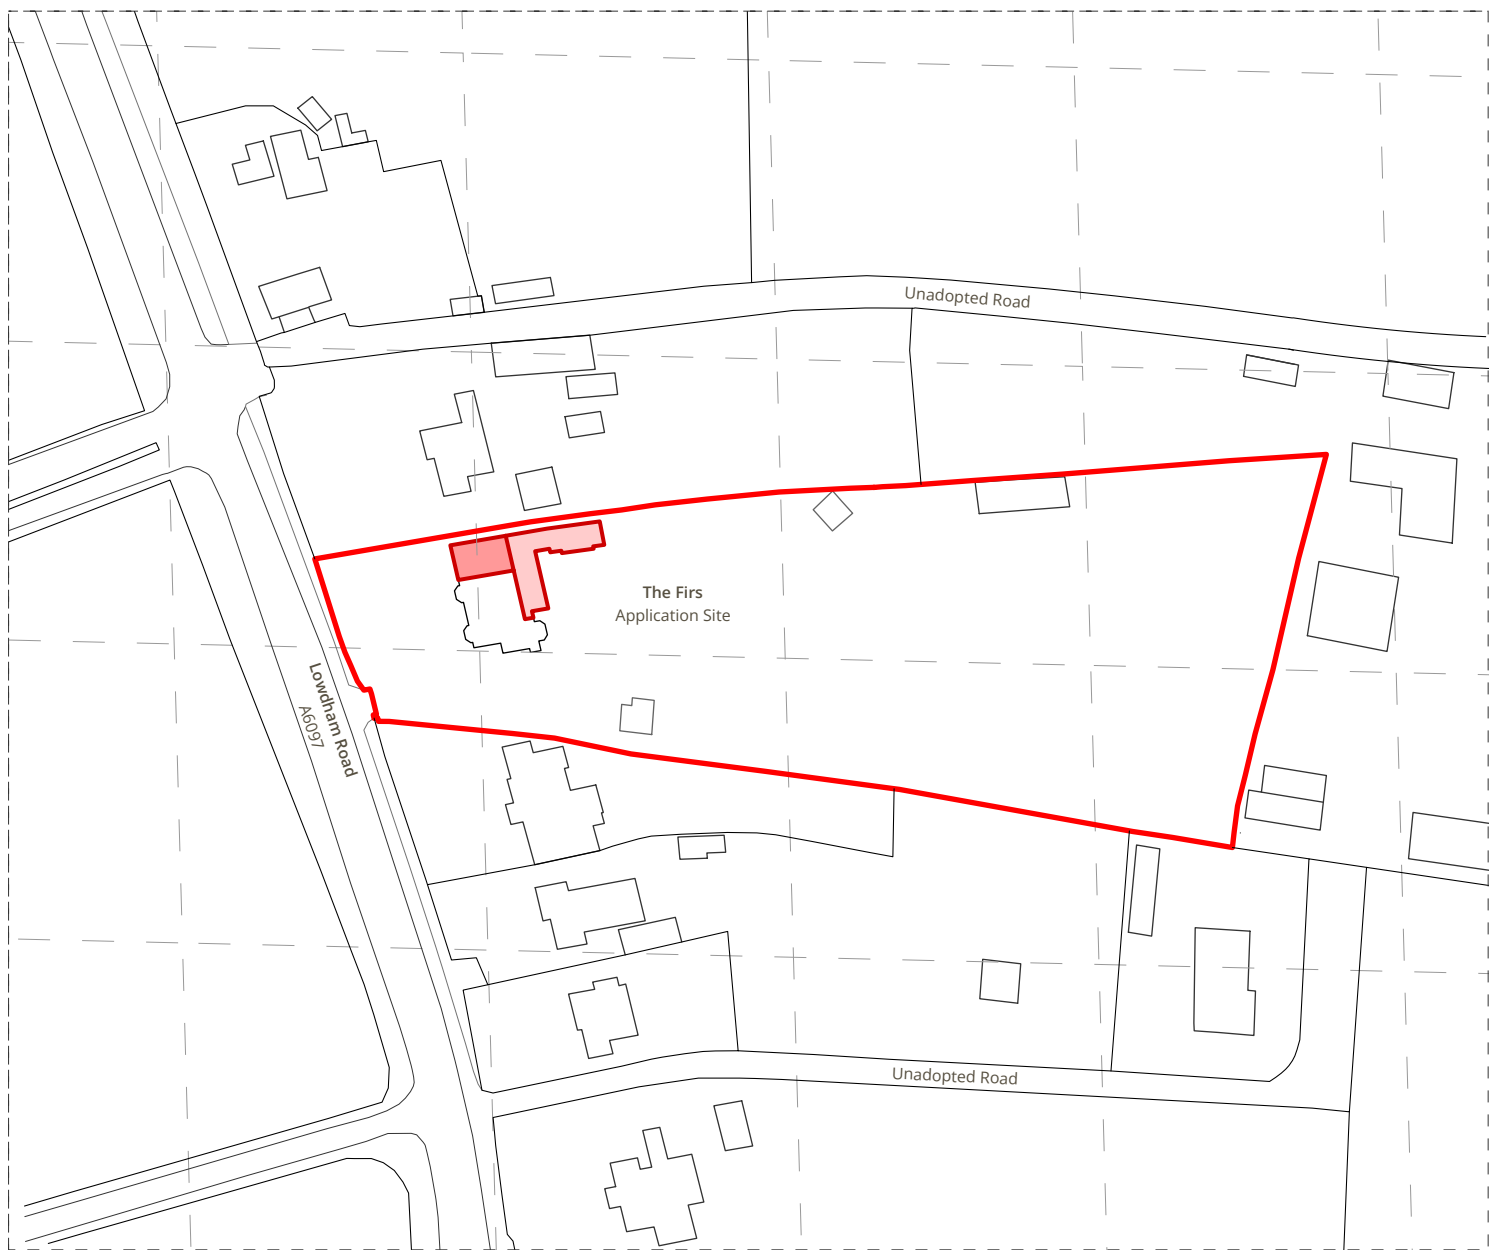

Proposed Site Location Plan

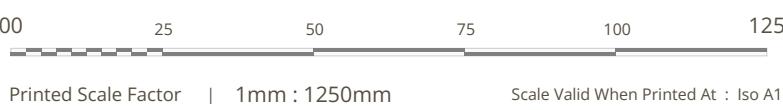

Mapping Data Credentials
OS License Number: 100053143
© Crown copyright 2026 Ordnance Survey



DV01 | Additional Storey Above Garage

This note identifies the two-storey side extension, the only element of the proposal that rises above single storey. New accommodation is formed above the footprint of the existing garage within a new pitched cat-slide roof finished in plain clay tiles to match the main house, lit by two modest dormers. The front-facing appearance is deliberately traditional so that the wing matches in with the existing style and character of the host dwelling, and the cat-slide form sweeps the roof low over the retained garage door, softening the front massing so that the wing reads principally as quiet tiled roof rather than as wall. The new ridge is held below the main ridge; on the front elevation the roof plane is stepped down and broken away from the main roofline so that the original dwelling remains the dominant structure, while on the rear the new plane aligns with the existing roof. The wing consequently reads as a smaller and more recessive mass than the flat-roofed garage box it replaces. All structural elements are subject to the provisions of note ST02.

DV02 | Single Storey Rear Extension

This note identifies the single-storey rear extension, the connective mass of the scheme. It occupies the ground between the existing built elements of the rear elevation and links to the retained octagonal bay through a fully glazed link that reads as a recessive, transparent joint. The extension carries a parapet-concealed warm flat roof held well below the eaves of the two-storey host, lit by a three-part arrangement of Korniche roof lanterns chosen for their exceptionally slim, almost frameless profile. Walls are finished in through-coloured monocouche render with three sets of black aluminium bi-folding doors opening onto the upper terrace. The form is deliberately different from DV01: where the side extension is pitched, tiled and traditional because it addresses the street, the rear extension is flat, crisp and contemporary because it addresses only the private garden, in accordance with the two-part appearance strategy at Section 5.0 of the Design and Access Statement.

DV03 | Garden Room

This note identifies the garden room, which is deliberately expressed as a separate structure rather than as a further extension of the house. It stands on the base of the removed greenhouse, is set down a step from the main floor level with reduced eaves and door heights, and is turned at the slight two-degree angle that follows the established local grain of rear outbuildings, as explained at Section 4.4 of the Design and Access Statement. Its central roof and walls are finished in dark, almost black standing seam metal, visually detaching it from the white rendered house and rear extension so that it reads as its own quiet building within the garden. It serves as an entertaining space opening directly onto the terrace. The deliberate differentiation of this mass from DV02, and of DV02 from DV01, is the foundation of the massing strategy at Section 6.0 of the Design and Access Statement.

GC01 | Ground Conditions Trial Pit 01

This marker records the location of hand-dug trial pit GC01, the first of two ground condition investigation points opened within the curtilage to inform the surface water drainage strategy. The pit was excavated manually by spade to a practical depth of approximately 650 mm and revealed a generally gravelly, sandy loam of visibly free-draining character throughout its full depth. Critically, no mudstone, shale, or other impenetrable stratum was encountered at any point within the excavation. These findings along with photographic evidence are reported in full at Sections 8.0 and 9.0 of the Design and Access Statement.

VG01 | Relocation Of The Existing Ornamental Cherry Tree

The small ornamental cherry (of the Prunus, flowering cherry family) presently standing by the existing rear terrace is to be carefully lifted and relocated, not felled. Its new position is at the far end of the terrace composition beside the veranda and jacuzzi area, where it roots directly within the buried soakaway zone beneath the new planting beds, actively assisting the drawdown of stored stormwater between rainfall events. No tree is removed by this proposal and no tree on or near the site carries any form of statutory protection, as evidenced at Section 3.3 of the Design and Access Statement. The relocation represents a positive horticultural move that retains the tree's spring blossom within the garden setting. The relocation must be undertaken by a competent landscape contractor, at an appropriate season and with an adequate rootball, to safeguard the ongoing health of the tree.