

SD20 - Provisional Steel Beam Added

Box Gutter Support Ref: T-02(03)

This steel member has been introduced by Noble Architecture solely as a schematic solution to accommodate the box gutter detail below the first-floor window. It must be clearly understood that this inclusion is a spatial exercise only and is based on unverified assumptions; absolutely no structural calculations exist for this member at this stage. The sizing indicated is arbitrary and must not be used for construction. The Client is to confirm acceptance of the resulting bulkhead detail or alternatively consider removing the first-floor window, which may negate the requirement for this complex steel arrangement. Upon confirmation of the design intent, the Structural Engineer must be strictly instructed to perform all necessary calculations to determine the actual member size, suitability, padstone, & connection details required for structural integrity.

SD21 - Provisional Sructural Design Change

Dual Steel Beam Arrangement Ref: B-10(01) & B-10(02)


This steel member has been introduced by Noble Architecture solely as a schematic solution to accommodate the box gutter detail below the first-floor window. It must be clearly understood that this inclusion is a spatial exercise only and is based on unverified assumptions; absolutely no structural calculations exist for this member at this stage. The sizing indicated is arbitrary and must not be used for construction. The Client is to confirm acceptance of the resulting bulkhead detail or alternatively consider removing the first-floor window, which may negate the requirement for this complex steel arrangement. Upon confirmation of the design intent, the Structural Engineer must be strictly instructed to perform all necessary calculations to determine the actual member size, suitability, padstone, & connection details required for structural integrity.

GN11 - Length Dimensions

All dimensions shown are to structural opening sizes or to coarse construction, representing bare wall dimensions only, including masonry openings, brickwork, blockwork, and studwork, unless expressly stated otherwise within the dimension text. These dimensions do not include plasterboard, internal linings, wall finishes, cladding systems, service voids, or applied finishes of any kind. As a result, final finished room sizes will be smaller than the dimensions shown once linings and finishes are installed. The Contractor shall allow for all required finishes, build-ups, and construction tolerances when setting out and carrying out the works.



Scan Me
View Project Portal

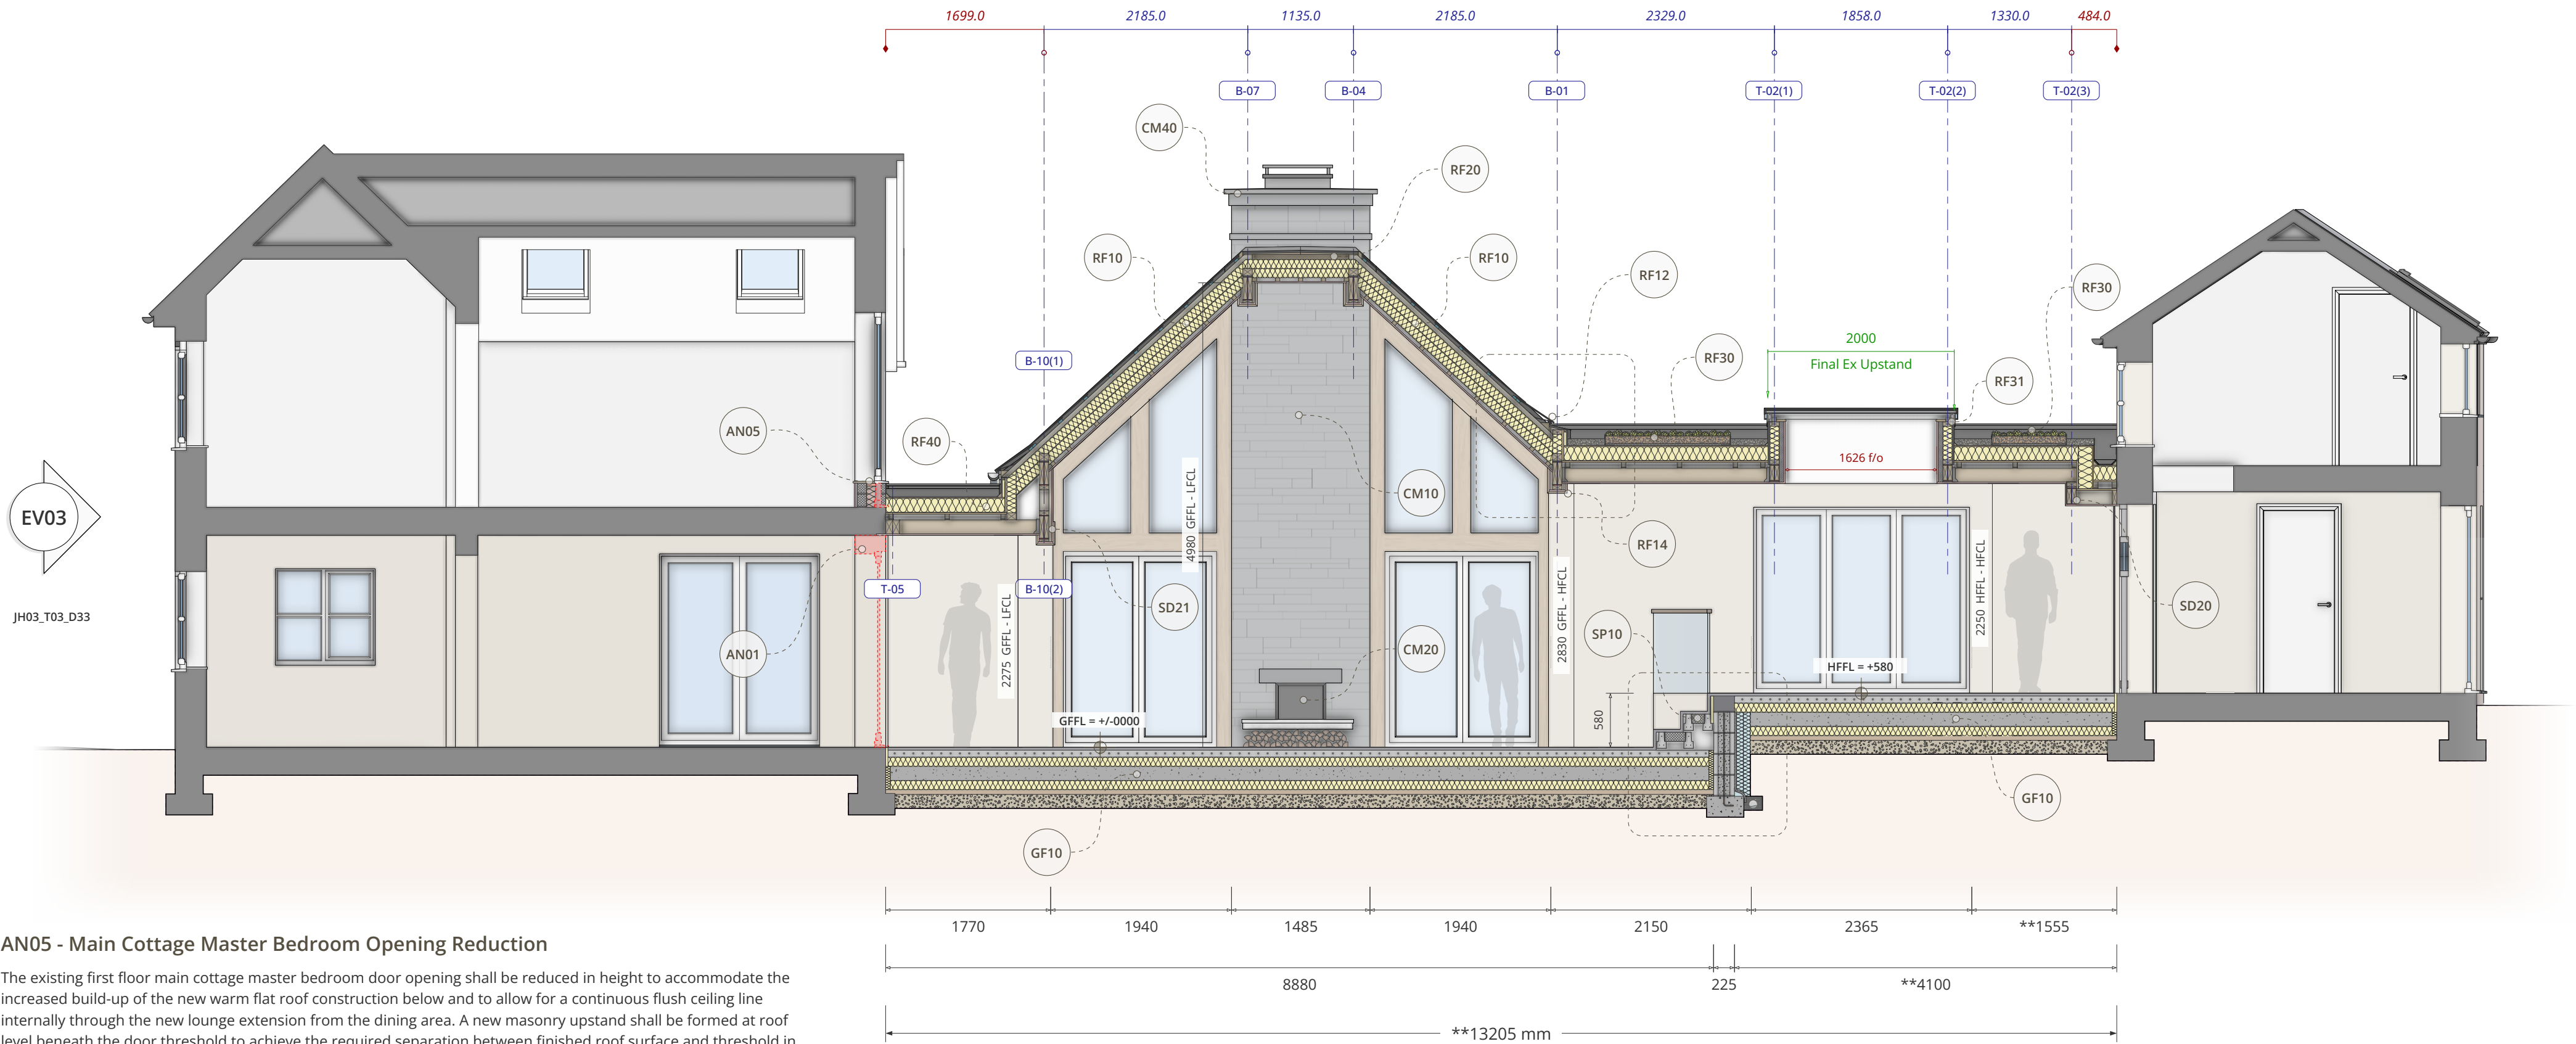

AN05 - Main Cottage Master Bedroom Opening Reduction


The existing first floor main cottage master bedroom door opening shall be reduced in height to accommodate the increased build-up of the new warm flat roof construction below and to allow for a continuous flush ceiling line internally through the new lounge extension from the dining area. A new masonry upstand shall be formed at roof level beneath the door threshold to achieve the required separation between finished roof surface and threshold in accordance with NHBC Standards Chapter 7.2, providing a minimum 150mm upstand above finished roof level. This requirement is driven by the depth of the warm roof insulation and deck and is not optional.

The door assembly shall be re-set onto the new upstand with full continuity of thermal insulation to prevent cold bridging at the junction. Internally, all making good shall be seamless, with new plasterwork, reveals, and finishes made good and painted to match the existing master bedroom. A new internal window board shall be installed to cap the raised upstand and form a finished internal detail.

Where the door functions as a Juliet balcony, guarding shall comply with Approved Document K and BS 6180, and all glazing within the door and any associated side panels shall be safety glazing to BS EN 12150 or BS EN 12600, with critical locations defined in accordance with Approved Document K. External doors and glazing shall be installed by a FENSA-registered contractor or otherwise provided with appropriate Building Regulations compliance certification.

All replacement door glazing shall achieve a maximum whole-unit U-value of 1.4 W/m²K or better in accordance with Approved Document L (2021 edition, including 2023-2025 amendments). Products shall be third-party certified, with relevant BBA certification where applicable. Any deviation from this detail, including any reduction in upstand height, shall be agreed in writing with Noble Architecture and Building Control prior to installation.

Technical Cross Section : A - A



AN01 - Existing Patio Doors & Wall Removal

Removal Of Existing Patio Doors And Installation Of Bearers The Contractor is to remove the existing patio doors situated between the dining area and the new extension, cutting back the head reveal to facilitate a continuous flush ceiling profile. Structural support is to be provided by timber bearers (Ref: T5/T6) specified as 75x150mm C24 timber. These must be chemically anchored to the existing masonry, strictly not into mortar joints using M12 resin anchors at 450mm horizontal centres, in accordance with the Structural Engineer's specification.

Line	Membranes & Key Layers Legend
—	DPC - Damp Proof Course
—	DPM - Damp Proof Membrane
—	VCL - Vapour Control Layer
—	Breather Membrane